


Benefits – Liquid Separator AS 2

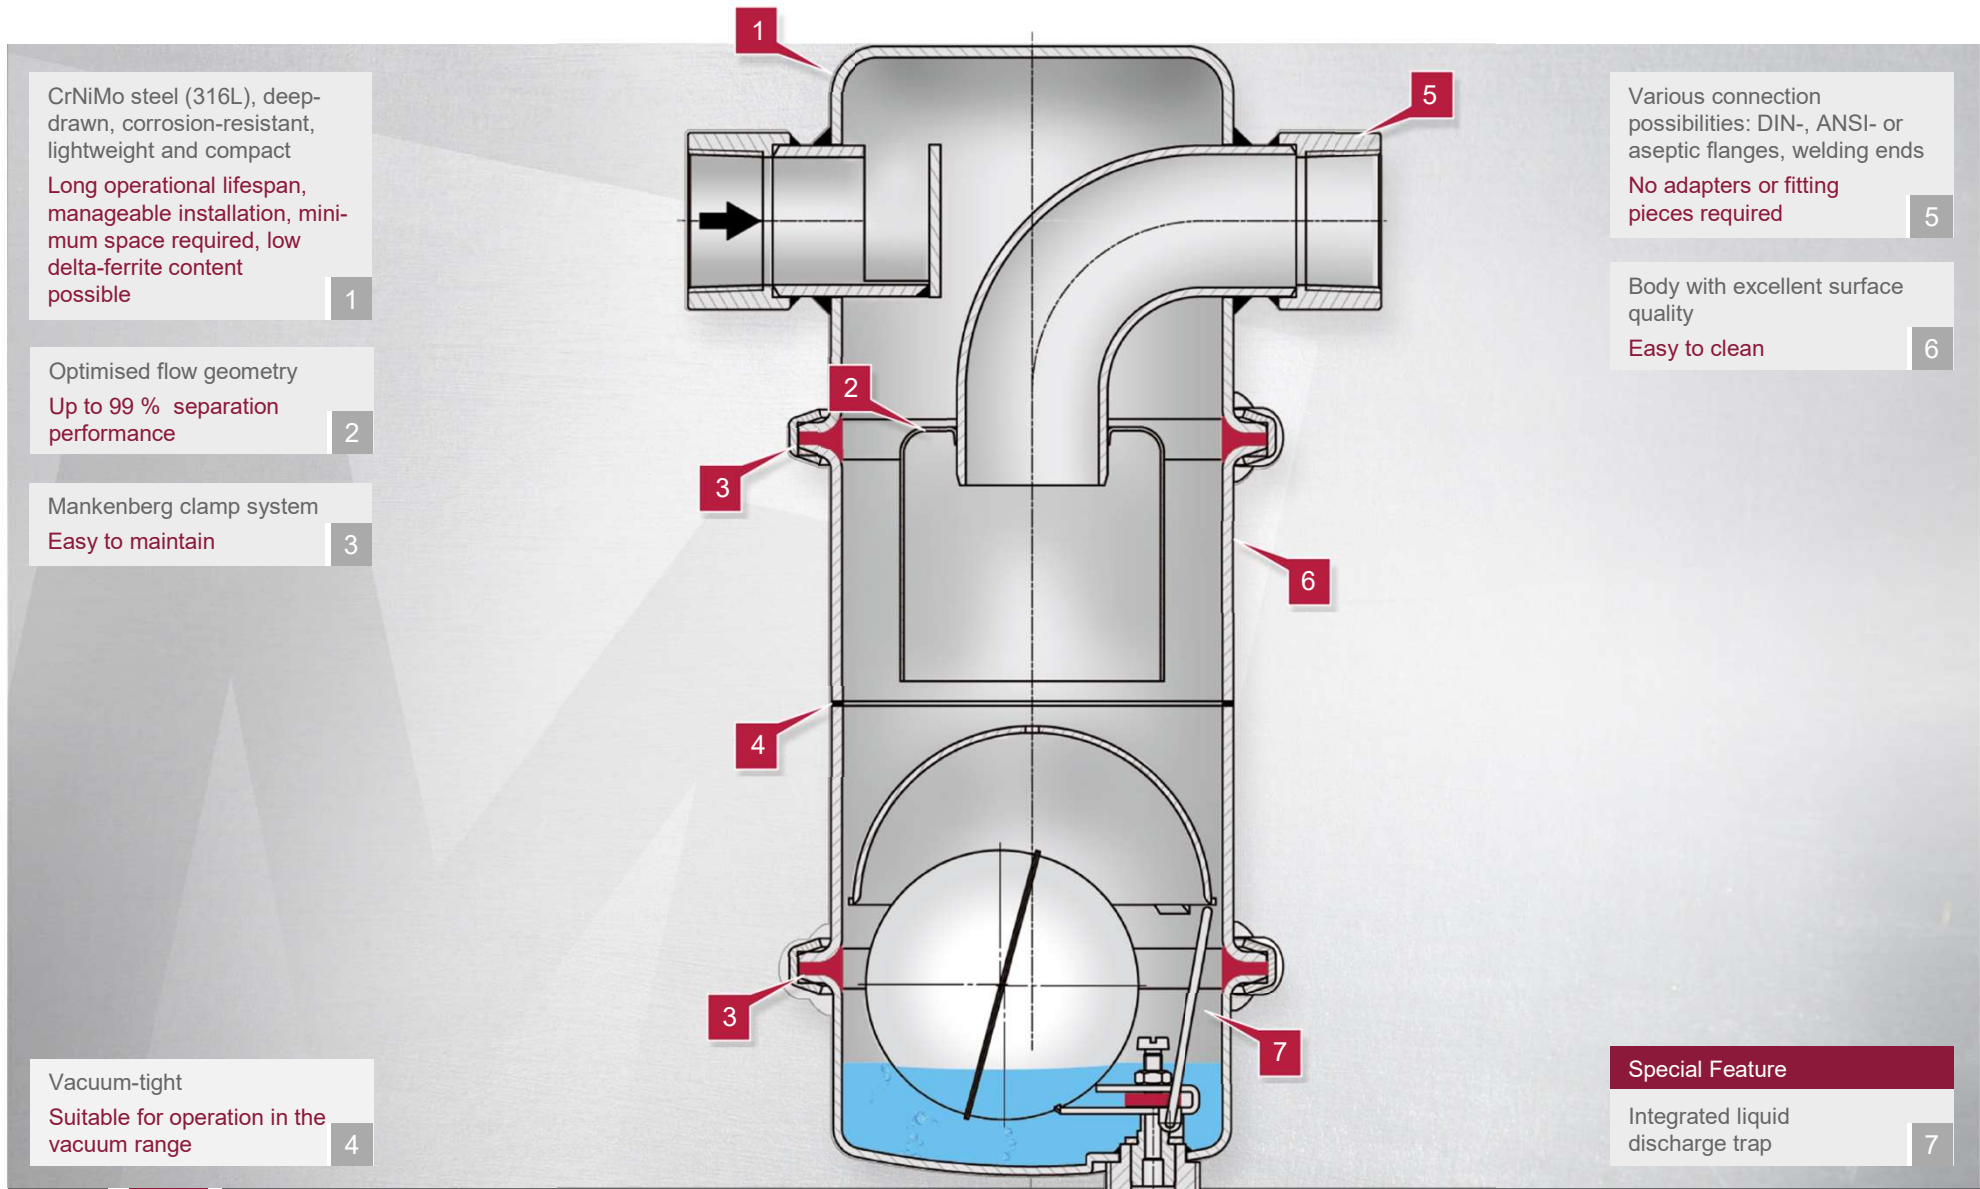

CrNiMo steel (316L), deep-drawn, corrosion-resistant, lightweight and compact
Long operational lifespan, manageable installation, minimum space required, low delta-ferrite content possible

1

Optimised flow geometry
Up to 99 % separation performance

2

Mankenberg clamp system
Easy to maintain

3

Vacuum-tight
Suitable for operation in the vacuum range

4

Various connection possibilities: DIN-, ANSI- or aseptic flanges, welding ends
No adapters or fitting pieces required

5

Body with excellent surface quality
Easy to clean

6

Special Feature

Integrated liquid discharge trap

7